



K-380EW

WI-FI Smart universal
air conditioner remote control




User Guide

Thank you for choosing our product.


Please carefully read this user guide before using
this product, and keep it for future reference.




COMPONENTS AND FUNCTIONS

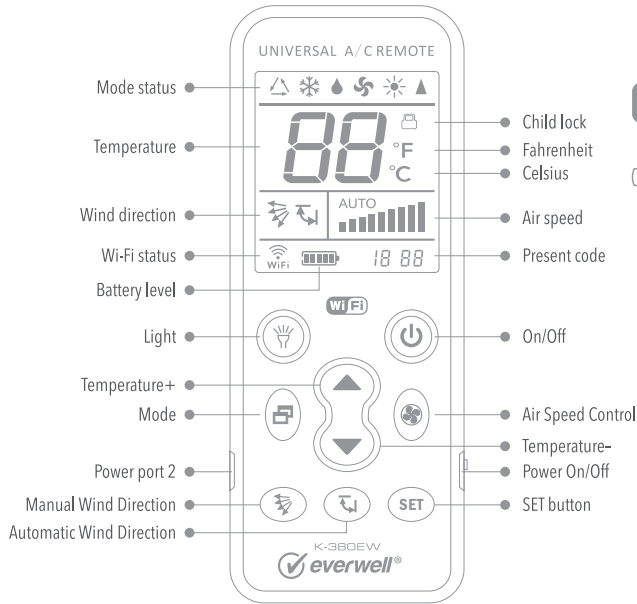

1 Place the remote control on the power base



3 Plug the power adaptor into the power outlet

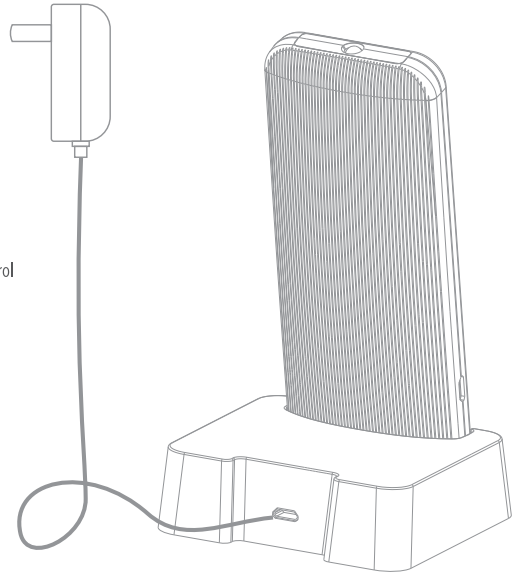

2 Plug the power cord into the base power inlet.



To charge the remote control

Please switch on the Power on the right side of the remote control and connect the power cord according to the above diagram to charge the battery.



Important Note

Before leaving the factory, this remote control uses 1000 as the default brand code, which directly works with most different Gree and Midea A/C models in the market. (There may be a few models which do not work with the default code, and users should follow the steps in <Setting Code Suitable for your A/C on the Remote Control> to search the right codes.)

SETTING CODE SUITABLE FOR YOUR A/C ON THE REMOTE CONTROL

This remote control provides 3 different methods to set the code for different A/C brands and models:

1 POINT-TO-POINT QUICK BRAND SEARCH

1. Power on the A/C manually and point the remote control at the A/C receiver window.
2. Press and hold the button corresponding to your brand, (e.g., LG corresponds to "Temperature+") until the A/C makes a "beep" sound and automatically switches on, and then immediately release the button.
3. Test if the buttons function normally. If yes, complete the setting, if not, repeat Step 2.

Corresponding button and brand table

Temperature +	Temperature -	Mode
LG/Samsung/Chunlan/Aux	Midea/Changhong/TCL/Shinco/Aucma	Gree/Hualing/Chigo/Hisense/Kelon
Air Speed Control	Automatic Wind Direction	Manual Wind Direction
Daikin/Fujitsu/Carrier	Sanyo/Sharp/Frestech/Y Air	Hitachi/Panasonic/Haier/Mitsubishi




2 MANUAL CODE ENTRY


1. Find the three-digit code corresponding to your A/C brand (e.g., LG code is "600"). Manually power on the A/C, and point the remote control at A/C receiver window.

421	499	500-550, 860, 943, 948
499	511-539	
511-539	551-599	
551-599	600-609	
600-609	610-629	
610-629	630-639	
630-639	640-659	
640-659	660-689	
660-689		

2. Press and hold the "SET" and "On/Off" buttons at the same time and release them when the code flashes in the remote control screen.

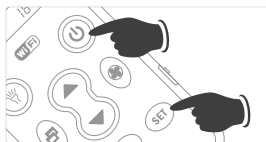

3. Press and hold "Temperature+" for the code to change rapidly, and release it for the code to pause; or you can press "Temperature+" or "Temperature-" intermittently until you set the appropriate code (e.g., "600");

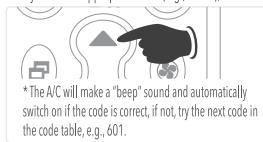

* The A/C will make a "beep" sound and automatically switch on if the code is correct, if not, try the next code in the code table, e.g., 601.

4. Press "SET" once to quit after the A/C makes a "beep" sound and automatically switches on. Test if the buttons function normally. If yes, complete the setting; if not, repeat steps 1-4.



3 MANUAL CODE SEARCH

1. Power on the A/C manually and point the remote control at A/C receiver window.



2. Press and hold the "SET" and "On/Off" buttons at the same time and release them when the code flashed in the remote control screen.



3. Intermittently press "Temperature+" for the code to increase one by one until the A/C makes a "beep" sound and automatically switches on.



4. Press "SET" once to quit. Test if the buttons function normally. If yes, complete the setting; if not, repeat steps 2-4.



CHILD LOCK FUNCTION

To lock: Press and hold the "SET" and "Manual Wind Direction" buttons at the same time until the screen displays the child lock icon. This means the child lock is operational. Release the buttons.
! When locked, code search and other settings will not work, however the remote control functions normally.

To unlock: Press and hold the "SET" and "Manual Wind Direction" buttons at the same time until the child lock icon disappears from the screen. The control is now unlocked.

TO RESTORE TO FACTORY SETTINGS

Press and hold "SET" + "Air Speed Control" buttons at the same time. The screen will display all the information after about 3s. Release the buttons to successfully restore the factory settings.

ATTENTION


You must point the remote control at the A/C receiver window.



DOWNLOAD AND INSTALL THE REMOTE CONTROL APP



Configure the A/C with one button and complete the process in 3 steps

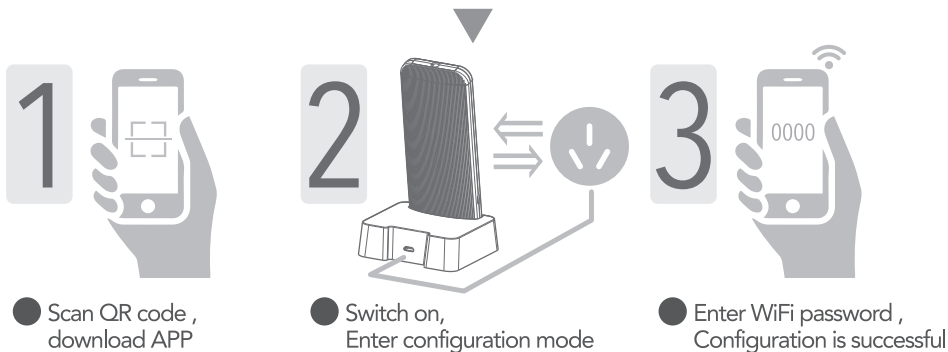Download APP to iPhone or an Android phone, and you can configure your A/C to connect to the network in 30s by just entering the Wi-Fi password.



1. Scan the following QR code to download and install the APP*. Register an account and successfully log in: * Or search "Genius Remote" in App Store or in Google Play to download and install the app.



2. Connect the remote control to the power supply base, and maintain the connection. When the Wi-Fi icon appears on the remote control screen, press and hold the remote control "On/Off" (⏻) button (for about 5s) and release it when  appears on the screen. After some time, the Wi-Fi icon  will flash rapidly, and the remote control will enter the configuration mode.

3. Make sure that your mobile phone is connected to the Wi-Fi network that needs to be configured. Touch [Add device] → [A/C remote control] → [Next] on the APP's home screen, enter the Wi-Fi password and touch [Configure]. The APP will prompt device added after the configuration is successful. You will now be able to control your A/C with the APP.




FAQs

Q: Cannot configure or no response during the configuration?

A: Please check if the Wi-Fi router can access the network. Please place the remote control into the power supply base; the remote control can be only used as a universal remote control if it is not placed into the power supply base; Wi-Fi remote control function is available only after the remote control is placed into the power supply base.


Q: Failed-Config?

A: Please check the router Wi-Fi signal strength and if network speed is normal, then try to reconfigure. Please place the remote control into the power supply base, and check if the remote control screen displays Wi-Fi icon ().


Q: Cannot control the A/C with remote control after successful configuration?

A: Please set the code on the remote control again. Confirm that the remote control can control the A/C and that the code displayed in the remote control matches with that displayed in the APP. After successful configuration, please first confirm that the code on the remote control screen matches the present code displayed in the remote control APP, and then use the APP's remote control function (about 3-5s delay, depending on network conditions). Otherwise, you may need to set the remote control again;

Q: The APP displays device offline?

A: Please place the remote control into the power supply base, and check if the remote control screen displays Wi-Fi icon (). Please check if the connected Wi-Fi router works normally.

Q: How can you know if the remote control is successfully connected to Wi-Fi?

A: The APP will display device online and the Wi-Fi icon () on the remote control screen will stay on when the remote control successfully connects to the Wi-Fi router. Wi-Fi function will be automatically disabled (Wi-Fi icon on remote control screen will disappear) when the remote control is disconnected from the power supply base. Wi-Fi function will be automatically enabled (Wi-Fi icon on remote control screen will appear) when the remote control is connected to the power supply base.

Tips:

- After replacing the router or restoring the router to factory settings, you must reconfigure the device by following the Add device step on the APP.
- 1-3s delay during remote control operation by mobile phone is normal. If there is a prolonged delay or there is no response, please test if the Wi-Fi network connection speed of the mobile phone and router are normal.
- You must point the remote control at the A/C receiver window.
- Please do not disassemble the remote control by yourself or throw it in fire as it has an inbuilt lithium battery.
- Please keep the remote control away from heat and fire, and please do not let children use the charger without adult supervision, as there may be potential safety hazards.
- It is recommended to charge with ambient temperature below 40°C. The battery will slightly heat up when fully charged, which is normal.
- Please switch off the Power on the right side of the remote control if you do not plan to use the remote control for a long time.

CODE LIST

ACSON	980	CORONA	760-769	GUQIAO	344
ADC	861	CROWN	861	HAIER	001-019
AITE	296-299	DAEWOO	332-333	HELTON	863
AKIRA	796-797	DAIZUKI	040-058,080-099,120-133, 180-199,245	HEMILTON	095
ALPIN	989-991,998	DAIKIN	740-759	HICON	391-392
AMCOR	501,508,509,532,973,978, 979	DAJINXING	329-330	HISENSE	230-239
AMICO	982	DAKE	861	HITACHI	640-659
AOKE	301-302	DAOTIAN	821-824	HONGYI	347
AOLI	300	DELONGHI	900	HUABAO	100-109
APTUN	862	DIY	044,090,092,095	HUAGAO	348
AUCMA	210-229,933	DONGXIA	334-335	HUAKE	349-350
AUX	180-199	DONGXINBAO	260-268	HUALING	150-169,045
BAIXUE	299	DUNAN	336	HUAMEI	351-352
BEIJINGJINGDIAN	304	EVERWELL	040-058,080-099,120-133, 180-199,245	HUANGHE	353
BIG-THUMB	331	ELCO	982	HUAWEI	281
BLUE STAR	057,550,887	ELDLONG	293-295,861	HUIFENG	354-356,357,360
BOERKA	630,305-306	ELECTER	981-986	HYUNDAI	780-789
BORLER	307	ELECTROLUX	471-474,807-808,250,906	INYCIN	475-483
BOSHI	310	FEDDERS	878	JIALE	358
BOSHIGAO	308-309	FEIEDRICH	879	JIANGNAN	359
BOYIN	290	FEIGE	829-830	JINBEIJING	361-362
CAIXING	311	FEILU	240-249,413	JINDA	491-492
CARRIER	599,690-699,890-899	FERROLI	901	JINSONG	363-365
CHANGFENG	190	FIRST	864	JMSTAR	360
CHANGFU	835-838	FRESTECH	270-279,944-945	JOHNSO	282
CHANGHONG	059-079,934,947	FUJITSU	700-719	KANGLI	368-370
CHANGLING	312-323	FUNIKI	992	KELONG	110-119
CHENGYUAN	324	GALANZ	124-129,134-139,936-940	KLIMATAIR	797-800
CHIGO	080-099	GEER	342-343	KONKA	366-367
CHUANGHUA	325-328	GLEE	280	KRIS	804-805
CHUANYAN	861	GOLDSTAR	303	KT02_D001	283
CHUNLAN	170-179	GOODWEATHER	827	KT02_D002	284
COLROLLA	861	GREE	000,020-039	KTY001	285
CONROWA	337-341	GUANGDA	345-346	KTY002	286
CONSUL	993			KTY003	287
				KTY004	288

CODE LIST

KTY005	289	SANYO	500-550,860,943,946	TIANJINKONGTIAO	424
LG	600-609	SANZUAN	190	TIANYUAN	425-428
LIANGYU	780	SAPORO	861	TOBO	250-269
LIKEAIR	386-387	SAST	450-452	TONGLI	429-430
LITTLESWAN	453	SENSOR	860	TOSHIBA	630-639
LONGHE	861	SERENE	499	TOTALINE	548
LOREN-SEBO	801-803	SHAMEI	400	TOYO	825-828
MCQUAY	790-795	SHANGLING	403-409	TRANE	812-816
MEILING	388-391	SHANXING	401-402	UNI-AIR	368-369
MIDEA	040-058	SHANYE	862	UTTLEDUCK	454-456
MINGXING	290	SHARP	720-739	VIDEOCON	597,627,628,629,884
mitsubishi	551-599	SHENBAO	410-411	VOLTAS	056,057,549,598,609,627, 628,629
MITSUKA	904	SHENGFENG	412	WANBAO	431-433
NATIONAL	660-689	SHENGFENG	413	WANGZI	861
NEC	500-550,860,943,946	SHINCO	200-209	WEILI	434-443,553-576
NIKKO	810-811	SHINING	415	WEITELI	444
NISO	398-399,497	SHUANGLU	416-418,946,948	WHIRLPOOL	119,550,770-774,739
NORCA	994	SIGMA	447	WUFENG	445-446
OGENERAL	659,717,718,719	SKYWORTH	877	XILENG	448-449
OLYMPUS	995-996	SOGO	291	XINGHE	462-463
OPAL	997	SONGLINXIA	862	XINHUABAO	290
PANASONIC	660-689	SONGXING	419	XINLE	457-460
PANDA	464-466	SOVA	292420	XINLING	461
PEREG	998	SOWA	862-863	XIONGDI	862
PILOT	902	SOYEA	421-422	YAIR	467-471,044,013-015
PINSHANG	290	SPEED	987	YAOMA	470,977
PUYI	862	SRTC	423	YIDONG	499
QIXING	393	STARIGHT-AIRCON	880	YORK	775-779
RAYBO	371-383	SUNBURG	817-820	YUETU	881-882,949
RHOSS	903	TADIRAN	501,508,509,532,630,969, 978,979,991	YUTU	484-490
RICAI	394	TAIYA	862	ZHONGYI	493-494
RIJIANG	395-397	TCL	120-133	ZUODAN	495
ROWA	383-385	TEAC	850-859	OTHER	496,498,821-828,839- 849,865-877,905-976,999
SACON	414	TECO	831-834		
SAMSUNG	610-629				

A WHOLE NEW MODEL IN THE INTERNET+ ERA!

We have created a totally unique remote control system for hundreds of millions of A/Cs in the world!



FROM NOW ON,
you can remotely control your A/C
with a mobile phone
anytime, anywhere
regardless of the distance!

